

100-0410 Cage Nut



DESIGNED FOR:

- Entrance doors and compartment doors with a 3/8"-16 or 7/16"-14 striker bolt application



www.trimarkcorp.com



500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com



TriMark Europe
Cedar Court
Walker Road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com



100-0410 Cage Nut

AVAILABLE:

- 3/8"-16 or 7/16"-14 threads
- Up to .250" (6.4mm) total vertical and .125" (3.2mm) total door seal adjustment
- One piece assembly for simplified installation
- Nut and retainer available separately for lowest cost

USE WITH:

- Please refer to our website for related products that are compatible for use with this product

For more information visit
www.trimarkcorp.com


INSTALLATION:

- Mounts with standard 1/4-20 screws (not included)
- Striker bolt mounting close to edge to allow use in applications where striker bolt is close to the frame edge

Steel nut withstands tensile loads applied to striker bolt in excess of 2500 lbs. (1134 kg) as required by FMVSS 206.

TOGETHER THE CAGE NUT AND STRIKER BOLT MEETS OR EXCEEDS FMVSS 206 LOAD REQUIREMENTS.

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

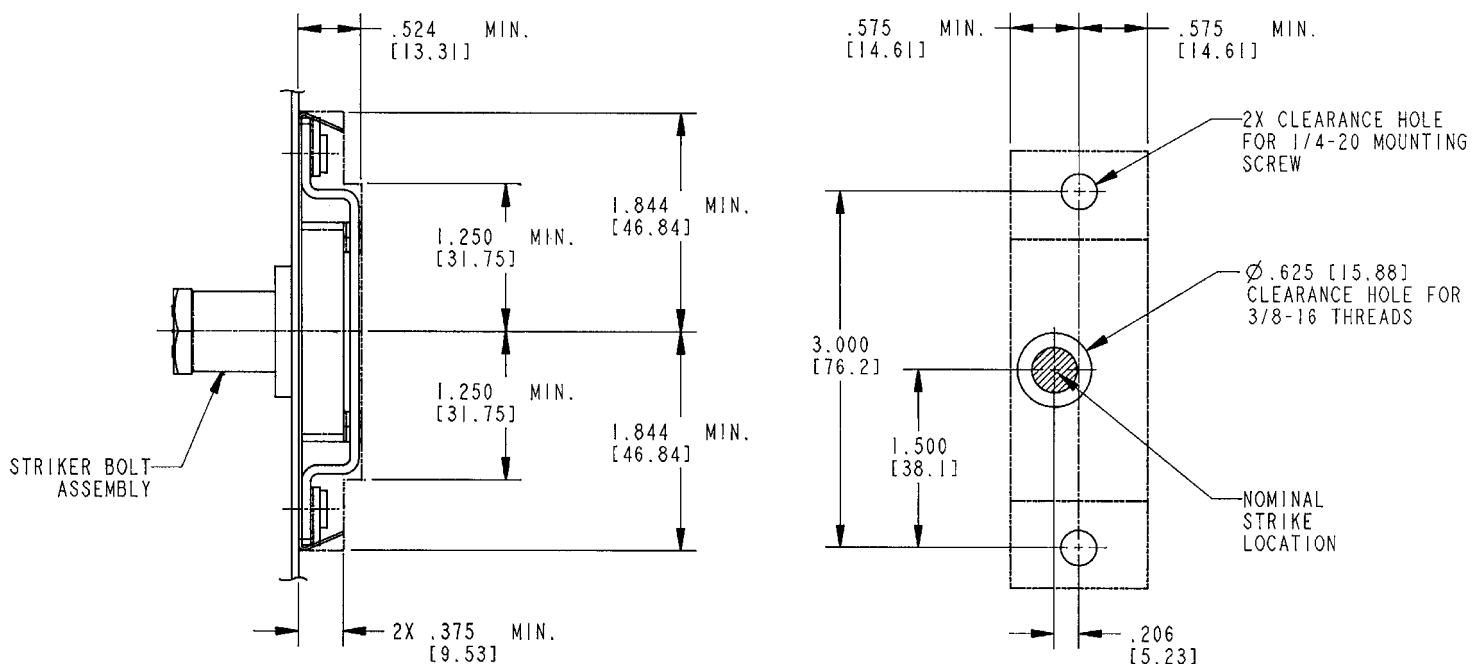

METRIC DIMENSIONS
SHOWN IN BRACKETS